


 **lectratek**<sup>™</sup> *Motor Controllers*  
powering eAviation



## Sylent Flight<sup>™</sup> Power Electronics

Take control of your eAviation  
with Lectratek motor controllers.

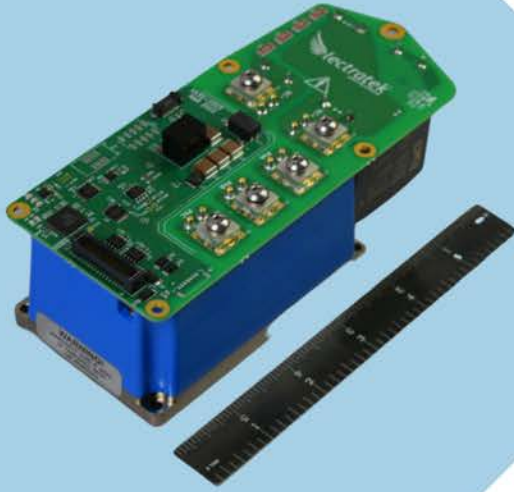

[info@lectratek.com](mailto:info@lectratek.com)

## Sylent Flight<sup>TM</sup> Motor Controllers



Scan the QR code  
to connect with sales,  
or contact us:

[info@lectratek.com](mailto:info@lectratek.com)  
**937-387-2738**  
[lectratek.com](http://lectratek.com)

PARAMETER	VALUE (NOTES)
Max. Continuous Output Power	24 kW
HV DC Bus Voltage	24-720 V
HV DC Bus Max Continuous Input Current	40 A
Continuous Output Motor Phase Current	40 A (Peak Sine Wave)
Transient Output Motor Phase Current	80 A (Peak Sine Wave, 2-second duration)
Control Input Voltage	28 VDC nominal (11-37 VDC range)
Control Current Draw	220 mA nominal (at 28 VDC)
Communication Protocols	2x CAN 2.0b, RS422
Size	6.2" x 2.6" x 2.4"
Weight	0.568 kg
Efficiency	>95% (full load)
Case Operating Temperature Range	-40°C to 70°C
Sensing	<ul style="list-style-type: none"> <li>• DC bus voltage</li> <li>• Motor RPM</li> <li>• Motor Iq current</li> <li>• Temperatures: motor, controller, DSP, IGBT, external</li> </ul>
Error Monitoring	<ul style="list-style-type: none"> <li>• Overvoltage</li> <li>• Undervoltage</li> <li>• Overcurrent</li> <li>• Motor enabled</li> <li>• Error condition</li> <li>• Command feedback</li> <li>• Loss of feedback</li> <li>• I2T error</li> <li>• Power bridge fault</li> <li>• CAN_A, CAN_B Tx error</li> <li>• Internal CAN Tx error</li> <li>• Internal buffer overflow</li> </ul>
Switching Frequency	10 kHz (customizable)
Part Number	LTEK-ESC-720-24
CAD Model	Contact us for CAD model and mounting dimensions
Vibration Resistance	+/-20G